INSTALLATION INSTRUCTIONS

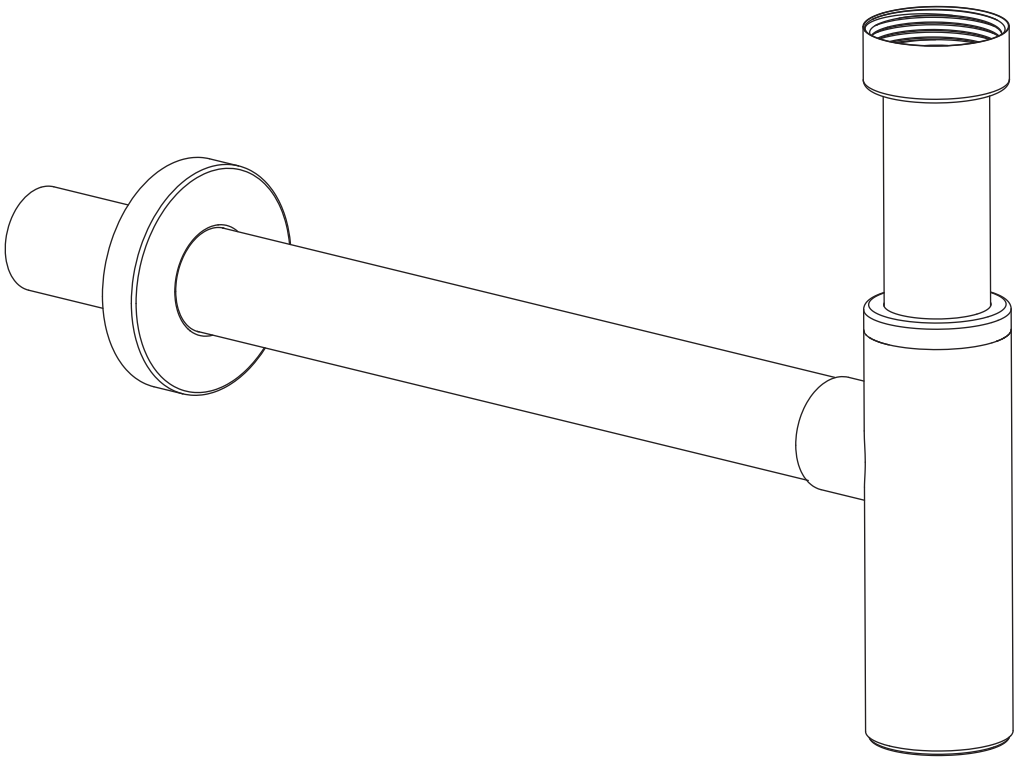

CONTEMPORARY BOTTLE TRAP

DIMENSIONS In Inches & Millimetres

CONTEMPORARY BOTTLE TRAP

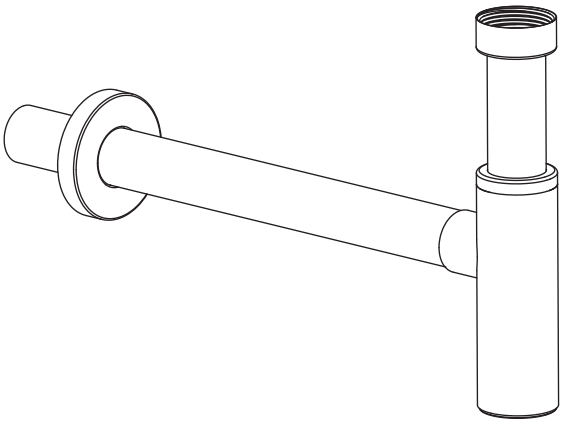

TOP VIEW

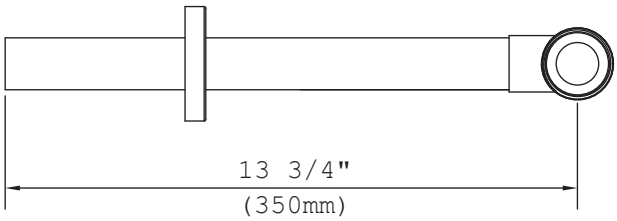

SIDE VIEW

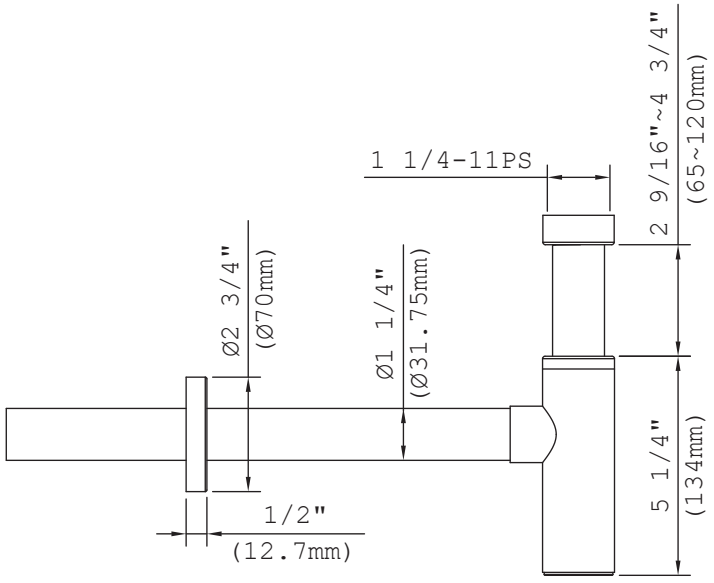

FRONT VIEW

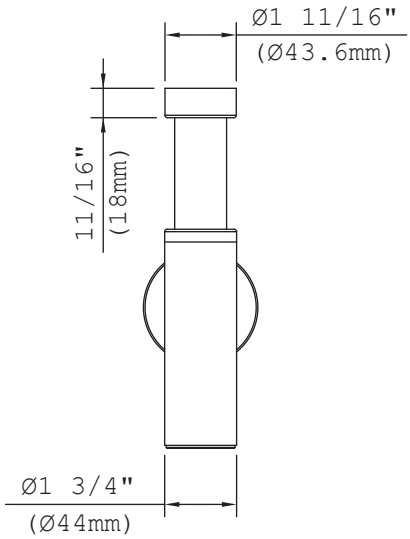

PRODUCT INFORMATION

TOOLS

Adjustable Wrench

Groove Joint Pliers

Hacksaw

Phillips Screwdriver


Level

Pipe Tape

Spatula

MAINTENANCE

- Your new product is designed for years of trouble-free performance.
- Keep it looking new by cleaning it periodically with a soft cloth. Avoid abrasive cleaners, wire wool and harsh chemicals as these will dull the finish and void your warranty.

IMPORTANT POINTS

- Prior to beginning installation, turn off the cold and hot water lines. If applicable, open the existing valve to release built-up pressure.
- Overtightening nuts may cause damage.
- Wrap all threaded connections with pipe tape available at your local plumbing supply store. Always wrap in clockwise direction. The fittings should be installed by a state licensed plumber.

SAFETY TIPS

- If you are soldering during faucet installation, remove cartridges, seats, gaskets and washers prior to applying flame, otherwise you will void the warranty.
- When cutting or soldering pipe, use safety glasses to protect your eyes.
- Cover drain openings to avoid losing small parts.

CODES/STANDARDS

- Meets A112.18.2

INSTALLATION METHOD

STEP 1-3

We always recommend that plumbing products be installed by a licensed professional.

1.

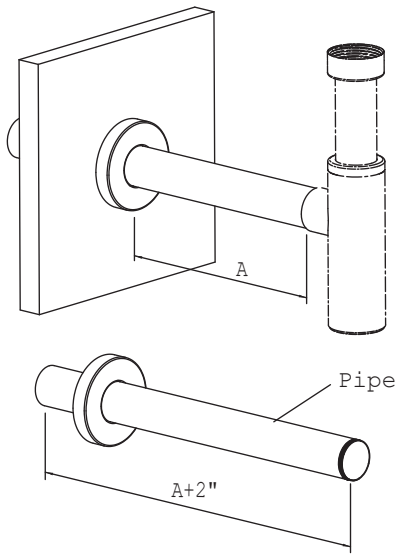

Measure distance from the Bottle Trap Body to wall hole surface. 2-inches (50mm) more than the measurement is required for the length of the Pipe for installation.

2.

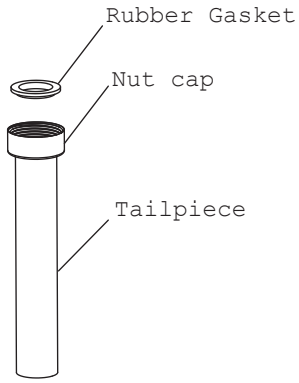

Make sure that the Tailpiece is threaded into Nut Cap securely, and the rubber Gasket is attached.

3.

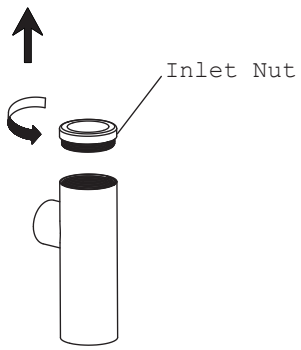

Remove the Inlet Nut and Plastic Tube from the Body.

INSTALLATION METHOD

We always recommend that plumbing products be installed by a licensed professional.

4.

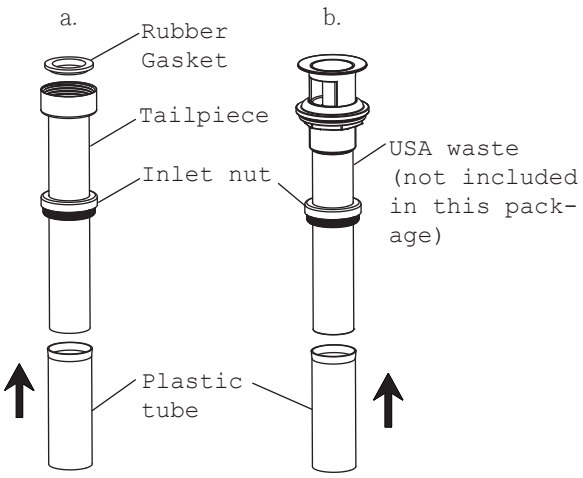

4a.Slide the Inlet Nut and the Plastic Tube over the Tailpiece in order as the figure shown. Then thread the assembly (with rubber Gasket attached) into the bottom of Pop-up waste (not included in this package) and tighten securely.

4b.For USA waste, assemble the Tailpiece of Pop-up waste to Trap as 4a.

5.

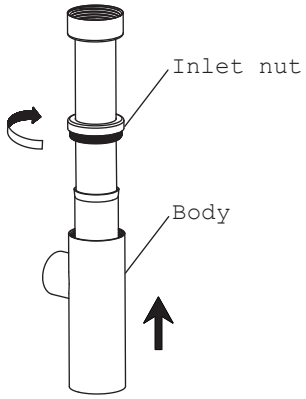

Connect the Bottle Trap Body with the Tailpiece assembly at appropriate position, then tighen up the Inlet Nut.

6.

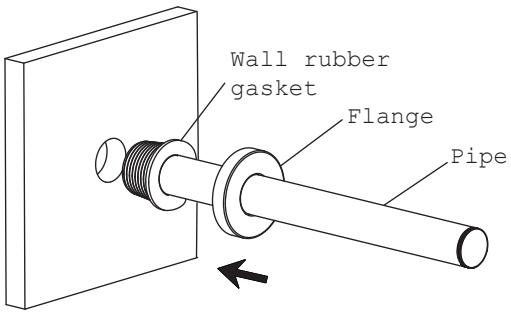

Slide the Flange and Wall Rubber Gasket over the Pipe, then insert the assembly into wall hole to connect with in-wall waste pipe.

INSTALLATION METHOD

We always recommend that plumbing products be installed by a licensed professional.

7.

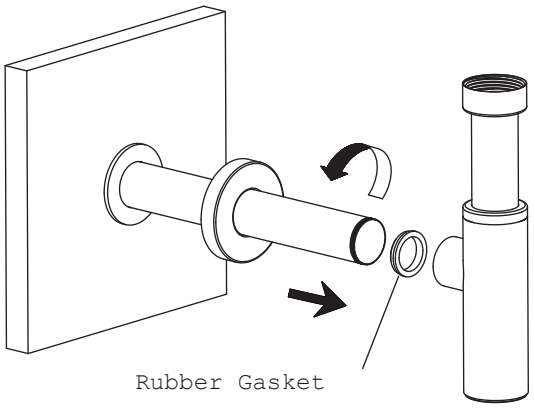

Thread the Pipe with Rubber Gasket into Bottle Trap Body and tighten securely. Slide the Flange over the Pipe until it presses against the wall.